

## FIRST RE-ESTABLISHMENT

### GCDB 700100

Township Corner on the Willamette Meridian:

- Section 36 Township 32 South, Range 1 West
- Section 31 township 32 South Range 1 East
- Section 6 Township 33 South, Range 1 East
- Section 1 Township 33 South, Range 1 West.

Found the Government standard 3" iron pipe with brass cap with standard marking for the year 1917 with cap 20" above ground for corner.

- Also found the original BT now a 31" Douglas fir intact, the face of which fir bears North  $41^{\circ}$  West 30.4 feet.
- Also found the Southeast BT now a 31" Douglas fir intact, the face of which fir bears South  $46\frac{1}{2}^{\circ}$  East 22.3 feet.
- The Northeast BT, a fir snag with two sets of old blazes and visible scribes.

Took new BTs as follows:

- A 6" laurel scribed CS-BT bears North  $41^{\circ}$  East 16.4 feet;
- An 8" Douglas fir scribed CS-BT bears South  $40^{\circ}$  West 56.1 feet, South 100 feet to top of ridge.

November 10, 1954  
C. Z. Boyden  
John L. Gartman

**SEE NEXT PAGE FOR SECOND RE-ESTABLISHMENT**

## SECOND RE-ESTABLISHMENT

### GCDB 700100

Township corner common to Section 36, Township 32 South, Range 1 West, Section 31, Township 32 South, Range 1 East, Section 1, Township 33 South, Range 1 West, Section 6, Township 33 South, Range 1 East, W.M.

Found at the corner, projecting 20 inches (51 cm), the 3 inches (7.6 cm) diameter iron pipe with standard GLO brass cap marked:

T32S	
R1W	R1E
S36	S31
— —	
S1	S6
T33S	
1917	

Original bearing trees marked by N. Ford in 1855 and recorded on First Re-establishment, page 3 (Township 33 South, Range 1 West) in 1954, found:

- Fir Stob, 25 inches (64 cm) diameter, containing scribed "BT" bears N40°30'E, 32.46 feet (9.89 m) to center. Record (1855): N30°E, 34.98 feet (10.66 m).
- Fir stump, 38 inches (96.52 cm) diameter bears N41°W, 31.60 feet (9.63 m) to center. Record (1954): N41°W, 30.4 feet (9.27 m).

Bearing tree marked in 1917 and recorded on First Re-establishment in 1954 found:

- Fir stump, 36-inch (91 cm) diameter bears S46°05'E, 23.57 feet (7.18 m) to center. Record (1954): S46½°E, 22.3 feet (6.80 m).
- Laurel, 14-inch (36 cm) diameter, with partially exposed face bears S21°30'W, 14.90 feet (4.54 m) to center of tree at base. Record (1917): S21°W, 15.18 feet (4.63 m).

Bearing trees marked on First Re-establishment found:

- Laurel 17 inches (43 cm) diameter, with partially exposed faces bears N42°15'E, 15.95 feet (4.86 m) to center of tree at base. Record: N41°E, 16.4 feet (5.0 m).
- Douglas fir, 12-inch (30 cm) diameter, with healed blazes bears Record: S40°W, (basis of bearing), 56.1 feet (17.10 m) to center of tree at lower blaze.

Marked new trees "CS" "BT" and took measurements to center of trees at lower blaze:

- Douglas Fir, 9-inch (23 cm) diameter bears N85°30'E, 36.33 feet (11.07 m).
- **Note:** No suitable tree in southeast quadrant.
- Douglas Fir, 5-inch (13 cm) diameter bears N57°55'W, 45.90 feet (13.99 m).

Corner lies approximately 900 feet (274.32 m) South of location marker on 24-inch (61 cm) diameter Fir located at (3) road junction and about 43 feet (13.11 m) S78½°W, of location marker on 11-inch (28 cm) diameter Douglas Fir, alongside road.

August 25, 1980

R. Frost

D. Danielson

Edward McGinty

County Surveyor

P.-173

SEE NEXT PAGE FOR THIRD RE-ESTABLISHMENT


### THIRD RE-ESTABLISHMENT

#### GCDB 700100

Township corner common to Section 36, Township 32 South, Range 1 West; Section 31, Township 32 South, Range 1 East; Section 1, Township 33 South, Range 1 West; and Section 6, Township 33 South, Range 1 East, W.M.

Found at the corner position, exp. 20 inches, the 3-inch diameter concrete filled galvanized iron pipe with 3½-inch diameter brass cap set by Elmer Strickler of the GLO in 1917.

Replaced said monument with 1 x 30-inch flanged galvanized iron pipe, 20 inches deep, with an attached 2½-inch diameter brass cap marked:

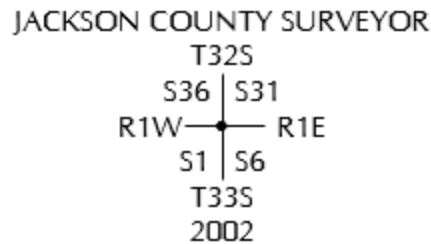

Bearing trees recorded on Second Re-Establishment in 1980, found burnt and measured to center of tree at lower blaze:

- Single remaining original tree recorded by Nathaniel Ford in 1855, a fir stump bears N 41°W, 31.5 feet. Record: 30.4 feet to face.
- Fir stump bears S 46° E, 23.3 feet. Record: 22.3 feet to face.
- West fork of double laurel 15-inch diameter with healed blazes bears S 20½° W, 14.95 feet. Record: S 21° W, 15.18 feet.
- Douglas Fir 12-inch diameter with healed blazes bears Record: S 40° W, 56.1 feet.
- Laurel 18-inch diameter with healed blazes bears N 42° E, 15.7 feet. Record: N 41° E, 16.4 feet.

Set new references, 5/8 x 30-inch rebars exposed 0.4 feet with 1½-inch diameter aluminum caps marked:



- N 3½° W, 19.47 feet.
- N 68¼° W, 21.25 feet

Set fence posts by new references and corner monument.

Corner lies uphill and approximately 40 feet southwesterly of road.

October 17, 2002

H. Durkee

T. Newcomb

Roger R. Roberts

Jackson County Surveyor

P. -199

V. -17½°