

FIRST RE-ESTABLISHMENT

GCDB 100500

Section corner common to Sections 12 and 13, Township 36 South, Range 5 West, and Sections 7 and 18, Township 36 South, Range 4 West, W.M.

Found loosely set and projecting 12 ins. from a broken mound of stones, the 1½ ins. diam. iron pipe set on Survey No. 1327 in 1959.

Replace said pipe with and deposit it alongside of, a 1x36 ins. galvanized iron pipe, set 24 ins. in the ground to bedrock. Rebuild mound of stones and set in concrete in the top of new pipe, a 2½ ins. diam. brass cap marked:

T36S	
R5W	R4W
12	7

13	18
C.S.	
1986	

Original bearing tree marked by Ives and Hyde in 1854 found:

- Black Oak snag, now 26 ins. diam. with partial scribe marks visible in opened lower face, brs. Record: N20°W, 97.68 feet (slope distance) to said face.

Bearing trees marked on Survey No. 1327 found and measured to center of tree at root crown:

- Black Oak, now 8 ins. diam. with single healed blaze, brs. N42¼°E, 48.93 feet. Record; N41½°E, 48.84 feet.
- Black Oak, now 8 ins. diam. with single healed blaze, brs. S59½°E, 41.45 feet. Record; S60½°E, 41.58 feet.
- Madrone, now 9 ins. diam. with faded bark scribing visible, brs. S18°W, 12.70 feet. Record; S18½°W, 12.54 feet. Re-scribe this tree "CS" "BT".
- Black Oak, now 7 ins. diam. with single healed blaze, brs. N31°W, 50.58 feet. Record; N31½°W, 50.82 feet.

Corner lies on a 30% southwesterly slope, in a small opening, approximately 250 feet S50°W, from a switchback on a gravel road.

November 25, 1986
D. Edwards
R. Romio


Edward McGinty
County Surveyor

V = 19½°
p-335

**ADDENDUM:
GCDB 100500**

All bearing trees recorded on First Re-establishment in 1986 found as recorded.

Monument set on said First Re-establishment, now missing, set in exact location, exposed 12 ins. and in a large mound of stones, a 1 x 30 ins. flanged galvanized iron pipe with a 2½ ins. diam. brass cap, marked:

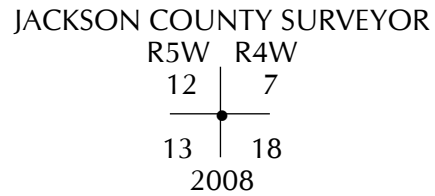

March 26, 2008
H. Durkee

Roger R. Roberts
Jackson County Surveyor

P. - 60