

FIRST RE-ESTABLISHMENT

DLC80NW

GCDB 880130

Re-establishment Northwest corner DLC #80, Township 38 South, Range 1 West.

Found the original Oak BT, N15°E, with scribe legible. Also the original Oak BT, N89¼°E intact, from which set a temporary corner in the bed of Bear Creek, a point subject to overflow.

Therefore, at a point on the DLC line, S0°20'40"W, 264.4 feet.

Set a 1½" x 36" galvanized iron pipe for witness corner which falls on top of an earth and gravel dyke 10' high and 4' wide on top.

From said witness corner:

- A 20" Cottonwood scribed WC CS-BT bears N55½°W 87.2 feet.
- A 12" Cottonwood scribed WC-CS-BT bears S21¾°W, 35.3 feet.
- A 36" Cottonwood scribed WC-CS-BT (on one blaze) bears S86¼°E, 76.4 feet.
- The center of Bear Creek bears North 310 feet.

December 16, 1953

C. Z. Boyden

L. D. Pinkham

M. E. Boyden

SEE NEXT PAGE FOR SECOND RE-ESTABLISHMENT

SECOND RE-ESTABLISHMENT

DLC80NW

GCDB 880130

Northwest corner to DLC No. 80, located in Section 14, Township 38 South, Range 1 West, W.M.

From the following original evidence, at the location described below, set a 1 x 36-inch Galvanized iron pipe, 36 inches in the ground with a 2½-inch diameter brass cap marked:

T38S R1W

DLC

NW
80
C.S.
1984

Original bearing trees marked by S. Truax in 1855 and reported on First Re-establishment in 1953.

Found as follows:

- White Oak, 24-inch diameter containing scribe mark in partly exposed upper face, bears Record: N15°E, 214.50 feet to scribed face.
- White Oak, 26-inch diameter, with healed blazes, bears Record: N89°15'E, 253.44 feet to estimated face. Re-measure 253.73 feet to center of tree.

Marked new trees "CS" "BT" and took measurements to center of trees at lower blaze:

- Cottonwood, 5-inch diameter, bears S24°31'E, 96.25 feet.
- Cottonwood, 13-inch diameter, bears S84°41'W, 190.45 feet.
- A found ¾-inch diameter bolt, with 1 ⅜ inches square head set in concrete, in the top of 6 inches diameter concrete pipe, bears N0°11'49"W, 366.48 feet. Reference Survey No. 929.

Corner lies an estimated 350 feet, N45°E of location marker atop a wood guard rail post, located about 650 feet Northwesterly of the most Northerly end of parapet wall of freeway bridge crossing Bear Creek.

Note: The witness corner described on First re-establishment as atop a "dyke" is now gone along with reference trees and the "dyke."

November 14, 1984
E. McGinty
R. Frost

Edward McGinty
County Surveyor

P. -120

SEE NEXT PAGE FOR THIRD RE-ESTABLISHMENT

THIRD RE-ESTABLISHMENT


DLC80NW

GCDB 880130

Northwest Corner of Donation Land Claim No. 80, located in Section 14, Township 38 South, Range 1 West, W.M.

The monument set on the Second Re-establishment, dated 1984, has been destroyed by flooding.

From the following evidence: Set a 1 x 30-inch Galvanized iron pipe, 26 inches in the ground with a 2½-inch diameter brass cap marked:

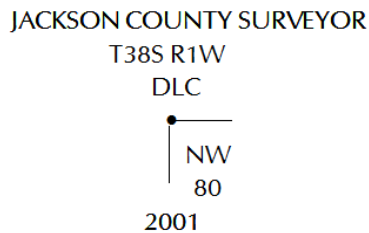

From which:

Original bearing trees marked by S. Truax in 1855:

- White Oak, 25-inch diameter containing scribe mark in partly exposed upper face, bears Record: N15°E, 214.50 feet to scribed face.
- White Oak, 27-inch diameter, with sawed open lower blaze, bears Record: N89°15'E, 253.44 feet to scribed face.

Second Re-establishment references found:

- Cottonwood, 10-inch diameter, bears S24°21'E, 96.23 feet to center of tree at base. Record: S24°31'E, 96.23 feet.
- Cottonwood, 18-inch diameter, bears S84°39'W, 190.40 feet to center of tree at base, Record: S84°41'W, 190.45 feet.
- A found ¾-inch diameter bolt, with 1⅜ inches square head set in concrete, in the top of 6-inch diameter concrete pipe, bears N0°11'49"W, 366.44 feet. Record distance: 366.48 feet.

Corner is located on the West side of Bear Creek and an estimated 350 feet, N45°E of location marker atop a wood guardrail post, located about 650 feet Northwesterly of the most Northerly end of parapet wall of freeway bridge crossing Bear Creek.

June 6, 2001
S. Beecher
T. Newcomb

Roger Roberts
County Surveyor

P. - 19