

FIRST RE-ESTABLISHMENT

DLC81SE

GCDB 571500

Southeast corner DLC 81, Township 38 South, Range 1 West.

Found the stump remains of the Southeast and root remains of the Southwest witness trees which fit in proper relation to the original Government record. Which corner location agrees favorably with the $\frac{1}{4}$ corner to Sections 11 and 14.

From this evidence:

- Set a 1½"x 36" galvanized iron pipe 4" below the pavement of Payne Road for corner.

From which:

- A 9" White Oak scribed CS-BT bears S29¼°W, 121.8 feet;
- A 16" White Oak scribed CS-BT bears S72½°W, 81.3 feet;
- The center of a 30" English Walnut tree bears N68°E, 52.00 feet;
- The center of a 24" Willow bears S32½°E, 52.3 feet.

December 19, 1956
Mark E. Boyden
K. D. Weaver

SEE NEXT PAGE FOR SECOND RE-ESTABLISHMENT

SECOND RE-ESTABLISHMENT

DLC81SE

GCDB 571500

Southeast corner Donation Land Claim No. 81, Township 38 South, Range 1 West, W.M.

Found the 1½" galvanized iron pipe, 6" deep, set for corner on the First Re-establishment on December 19, 1956.

Replaced said 1½" pipe with a 3 ~ bronze disk, set in a 20" diameter x 14" deep concrete base, 8" deep in a monument case, stamped:

JACKSON COUNTY
T38S, R1W
SE | DLC
Cor. | 81
1970
CONTROL MONUMENT

From which:

- A 36" English Walnut tree bears N67°50'E, 52.0 feet to center of the tree (1956 Record: 30" English Walnut, N68°E, 52.0 feet);
- A 28" Willow bears S33°08'E, 51.5 feet to center of the tree (1956 Record: 24" Willow, S32½°E, 52.3 feet).

New references were taken as follows:

- A lead plug with tack in the South end of a concrete head wall bears S60°13'W, 41.51 feet;
- A cross in a concrete diversion box wall bears S88°58'W, 35.80 feet;
- A ¾" rebar with drill hole, flush with pavement, bears S0°15'W, 40.01 feet.

March 27, 1972
Lloyd Shreeve
Ray Webber

Approved by:
Mark E. Boyden
County Surveyor

SEE NEXT PAGE FOR THIRD RE-ESTABLISHMENT

THIRD RE-ESTABLISHMENT

DLC81SE

GCDB 571500

Southeast corner to Donation Land Claim No. 81, located on the section line common to Sections 11 and 14, Township 38 South, Range 1 West, W.M.

Found 8 inches deep, in monument case, the brass cap described on Second Re-establishment, page 55, dated 1972.

Directly over the above, set a 2½-inch diameter brass cap marked:

T38S R1W
DLC
SE
81

C.S.
1988

In concrete.

Reference trees (not scribed) recorded on First Re-establishment, page 31, in 1956 and reported in 1972 found and measured to center of tree(s) near base:

- English Walnut, 38-inch diameter, bears N68°40'E, 52.0 feet. Record: (1972) N67°50'E.
- Willow, 54-inch diameter, bears S32°20'E, 51.5 feet. Record: (1972) S33°08'E.

Additional references reported in 1972 found:

- A ¾-inch diameter rebar, found 1-inch below asphalt road surface, bears Record: S0°15'W, 40.01 feet.
- Tack in lead, found atop the south end of concrete irrigation gate headwall, bears Record: S60°13'W, 41.51 feet.

Take new references:

- The 2½-inch diameter metal post (Southwest) corner of cyclone fence, bears N64°29'E, 32.15 feet to center.
- Set 5/8 x 24-inch rebar, flush, with yellow plastic cap marked "Jackson C.S.", located 18 inches West of Power Pole No. 13828, br. S44°42'E, 32.23 feet.

Corner lies in middle of North bound driving lane of Payne Road near Residence No. 4015, about 25 feet Northerly of middle of road crossing concrete culvert.

May 25, 1988
R. Frost, Tech.
S. Beecher, Tech.

Edward McGinty
County Surveyor

P. -210

SEE NEXT PAGE FOR FOURTH RE-ESTABLISHMENT


FOURTH RE-ESTABLISHMENT

DLC81SE

GCDB 571500

Southeast corner to Donation Land Claim No. 81, located on the section line common to Sections 11 and 14, Township 38 South, Range 1 West, W.M.

Found 4 ins. below asphalt road surface the 2½ ins. diam. brass cap set on the Third Re-establishment, dated 1988, marked:

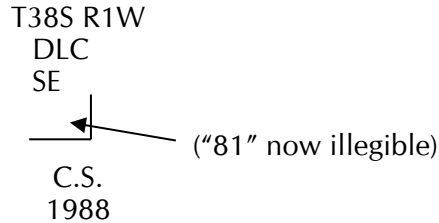

Over the existing monument, set an aluminum monument case in concrete.

From which reference set on the Second Re-establishment, dated 1972, and recorded in 1988 found:

- Tack in lead, found atop the south end of concrete irrigation gate headwall, bears record S60°13'W, 41.51 ft. and used for Basis of Bearing.

References set or taken in 1988 found:

- 2½ ins. diam. metal post (Southwest) corner of cyclone fence, bears N64°09'14"E, 32.11 ft. to center; record N64°29'E, 32.15 ft.
- Yellow plastic cap marked. "Jackson C.S.", located 18 ins. West of power pole No. 13828, bears record S44°42'E, 32.23 ft.

Corner lies in middle of North bound travel lane of Payne Road at the southerly driveway for residence No. 4015.

September 8, 2016
B. Paull
J. Hall
S. Beecher
E. Madden

Scott D. Fein
Jackson County Surveyor

P. -